

Substitutive cover materials for waste rock piles – a lysimeter study

MIN-NORTH (Development, Evaluation and Optimization of Measures to Reduce the Impact on the Environment from Mining Activities in Northern Regions) is a EU Interreg Nord program funded cooperation project between Geological Survey of Finland (GTK), University of Oulu (UO), The Arctic University of Norway (UiT) and Luleå University of Technology (LTU, coordinator) to study and reduce the environmental impacts of mining in the northern regions. The main objective of the project is to study


the management of waste rocks of the mining areas in Nordic region.

Acid rock drainage (ARD) is a major problem related to the management of mining wastes. ARD is generated when O₂ and water infiltrate the waste rock pile, oxidizing sulphide minerals e.g., pyrite and pyrrhotite. Different cover systems have been developed to prevent weathering processes. Material availability is one of the key challenges related to cover system design.

For instance, good quality till might be scarce in the mine area. Therefore, substitutive materials for cover systems are needed, while promoting the use of secondary resources.

In this study, functionality of various potential cover materials for waste rock has been compared, utilizing lysimeter tests at Kevitsa mine site. The 1 m diameter and 2 m tall lysimeters were installed in July 2017 and have been monitored since.

Tested cover structures and materials (A-F), and the drainage qualities after 1 year of monitoring

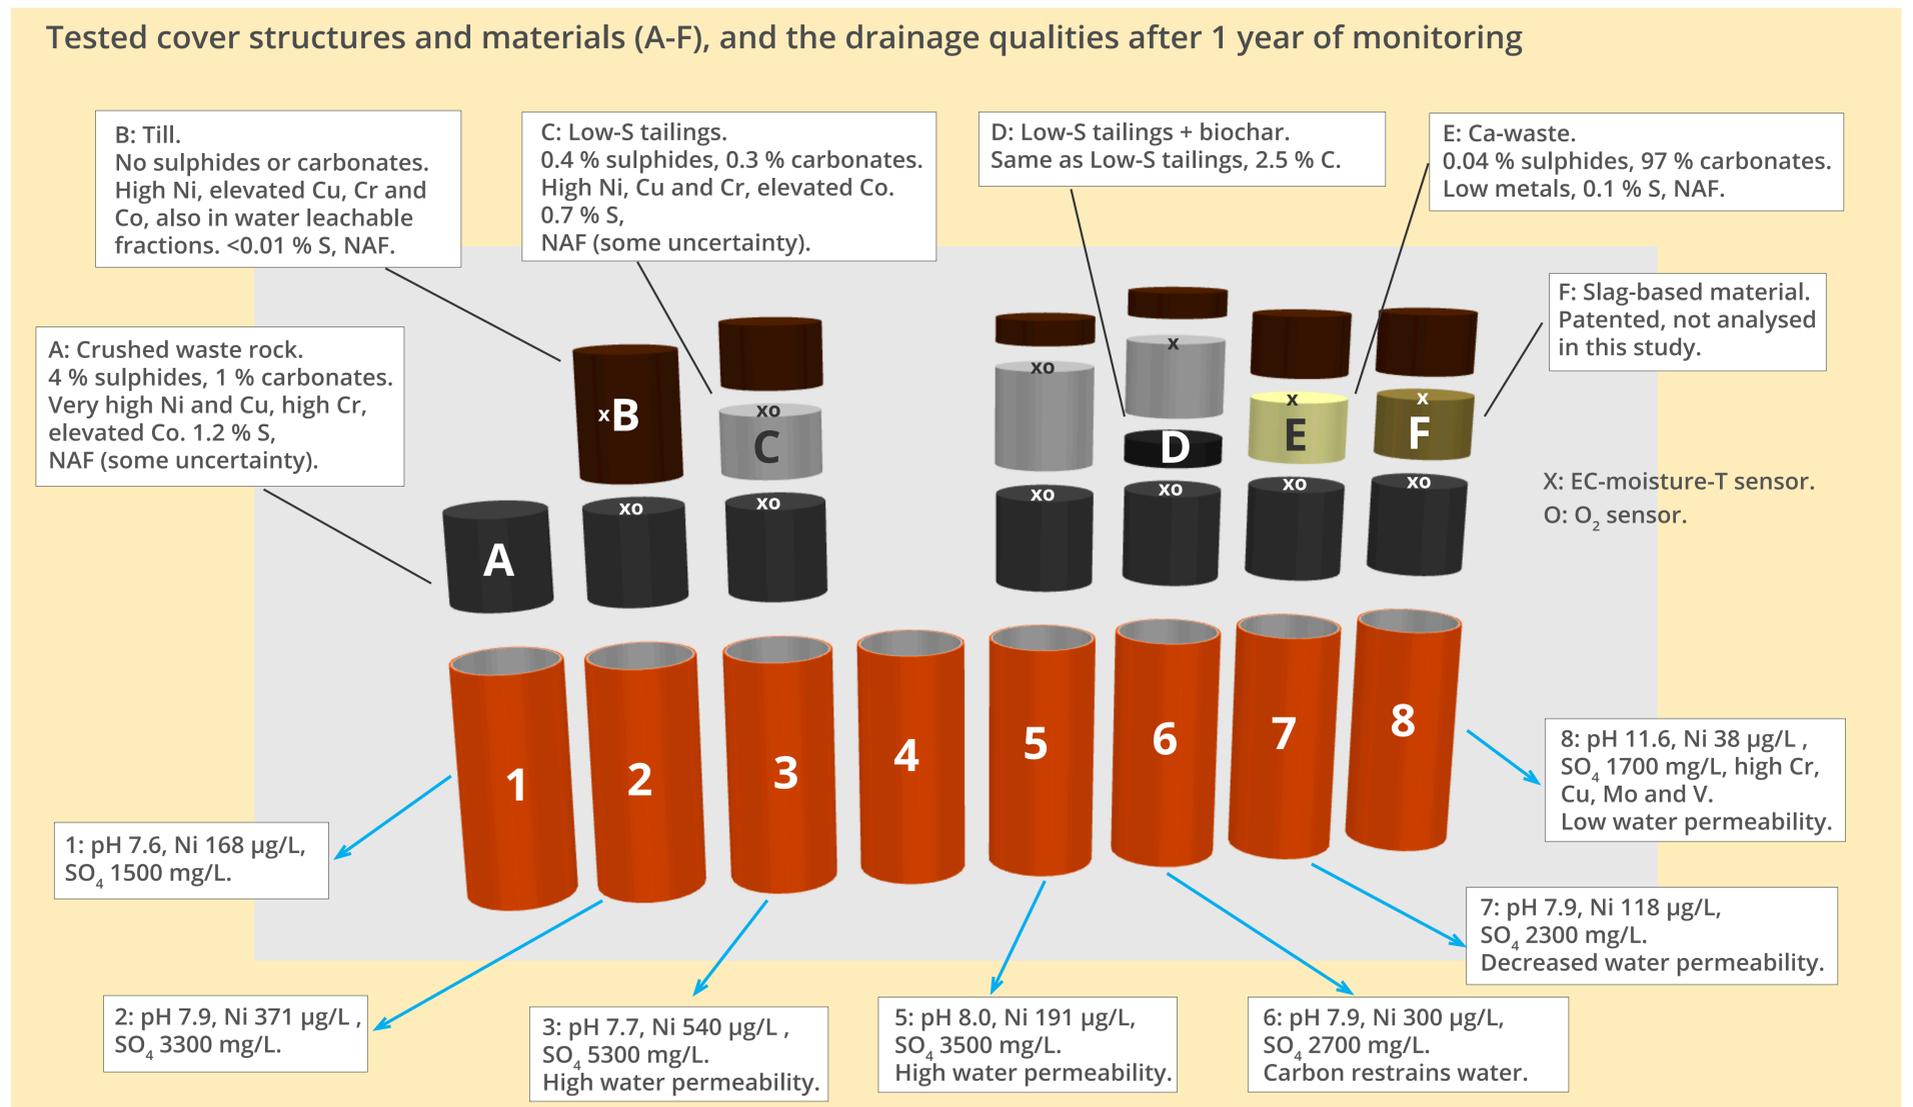

Conclusions after 1 year of monitoring

Till (B): low water conductivity (7.4×10^{-9} m/s), short term release of weakly bound elements, inefficient O₂ barrier. **Low-S tailings (C):** higher water conductivity (3.3×10^{-6} m/s), lower water retention, release of sulphide bound elements, inefficient O₂ barrier. **Low-S tailing + carbon (D):** same as above, carbon increases slightly water retention capacity. **Ca-Waste (E):** decreased water conductivity (3.5×10^{-8} m/s), decreased element release. **Slag-based material (F):** Low water permeability, decrease of Ni,

high release of Cr, Cu, Mo and V (short term?), high pH, more efficient O₂ barrier.

Several years of monitoring is needed for lysimeter studies, results presented here represent short term observation. No significant differences regarding O₂ permeability could be observed between till, tailings or Ca-waste based cover systems. Slag-based material seems to be more efficient O₂ barrier. Due to issues related to lysimeter structure, reliable O₂ results are hard to obtain.



OULUN YLIOPISTO
UNIVERSITY OF OULU

Geological Survey of Finland

Teemu Karlsson¹, Anna Tornivaara² and Pekka Forsman¹
¹Geological Survey of Finland, P.O. Box 1237, FI-70211 Kuopio, FINLAND
teemu.karlsson@gtk.fi

²Geological Survey of Finland, P.O. Box 96 FI-02151 Espoo, FINLAND

Interreg
Nord

European Regional Development Fund



EUROPEAN UNION



GTK
gtk.fi